



# Cobra/Primafuse

## Safety Fuse Assembly

### without Igniter cord connector



*Petro-Explo, Inc.*

PRODUCT : COBRA SAFETY FUSE ASSEMBLY

Manufacturer: Cia Mexicana de Mechas para Minas

#### SPECIFICATIONS:

- Total detonator charge : 800 mg
- Powder train weight: 4.7 g/m
- Burn rate: 141 – 148 s/m
- Tensile strength: 28 kg minimum
- Water resistance: 1 ATM/ 1 hour
- Jacket material: plastic
- Color: Orange
- Fuse lengths: 1m, 2m, 3 and 4 m


#### SHIPPING INFORMATION:

- Packaging : 1 and 2 meters – 54 units per box
- 3 and 4 meters - 45 units per box
- US DOT Classification: 1.4 B, EX-2005040494
- Canada Approved Explosive : 1.4 B and 1.1B.

STORAGE: Store in a dry and well ventilated magazine and approved by local, state and federal regulations.

#### WARNING AND RECOMMENDATIONS:

This product is not authorized to be used in avalanche control applications, except by certified blasters or by qualified avalanche control blasters as defined by NSSA, that are state or federal state licensed, and /or that are required to follow the NSAA guidelines and procedures in the use of explosives in avalanche control. In applications other than avalanche control, it is required that the user must be a certified blaster. When using safety fuse to initiate other detonators or explosive charges, it is recommended double priming. Also, in case of misfire it is recommended a waiting period of 60 minutes before the blaster or any other personnel returns to the blasting site.

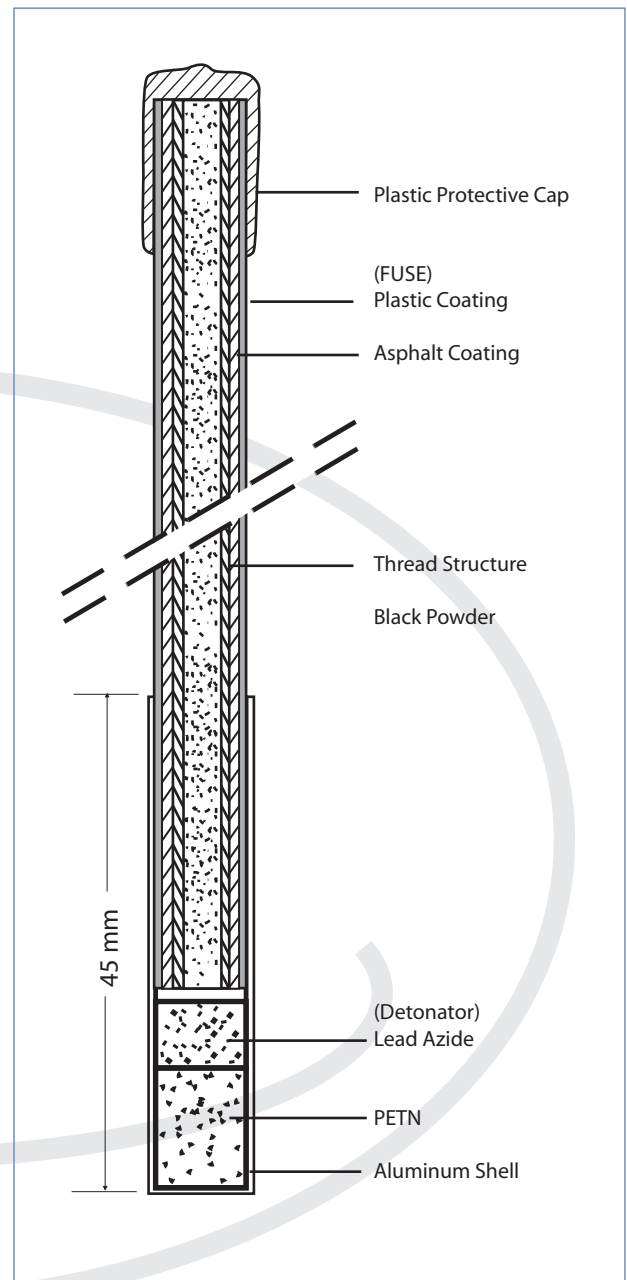

### Petro-Explo, Inc.

7650 U.S. Hwy. 287, #100, Arlington, Texas 76001  
Phone: 817-478-8888 800-588-8282 Fax: 817-478-8891  
email: info@petroexplo.com