



# Fulmelec

## No. 8 Instantaneous Electric Detonator



*Petro-Explo, Inc.*

### Construction specifications

Primary charge:	8.5 grains PETN (550mg)
Initiating charge;	3.9 grains L.A. (250 mg)
Shell OD:	6.55 mm
Shell ID:	N/A
Shell length:	45 mm
Shell material:	aluminum
Wire:	4ft PVC, 5 meters (16.4 ft)

### Electrical Specifications

Resistance:	1.64 ohms
All fire:	0.5 amps
No fire:	0.25 amps
100% No firing in water:	N/A
Necessary energy:	4.0 MJ/ ohm
Temperature resistance:	150°F ( 177° C)


### Shipping Information

Quantity per box:	400 units
Hazard Class:	1.4B, EX2007100500

### STORAGE

FULMELEC® must be stored in a dry, ventilated magazine and away from explosives and flammable products, according to applicable legislation.

When kept in its original package and properly stored, the shelf life is five (5) years.

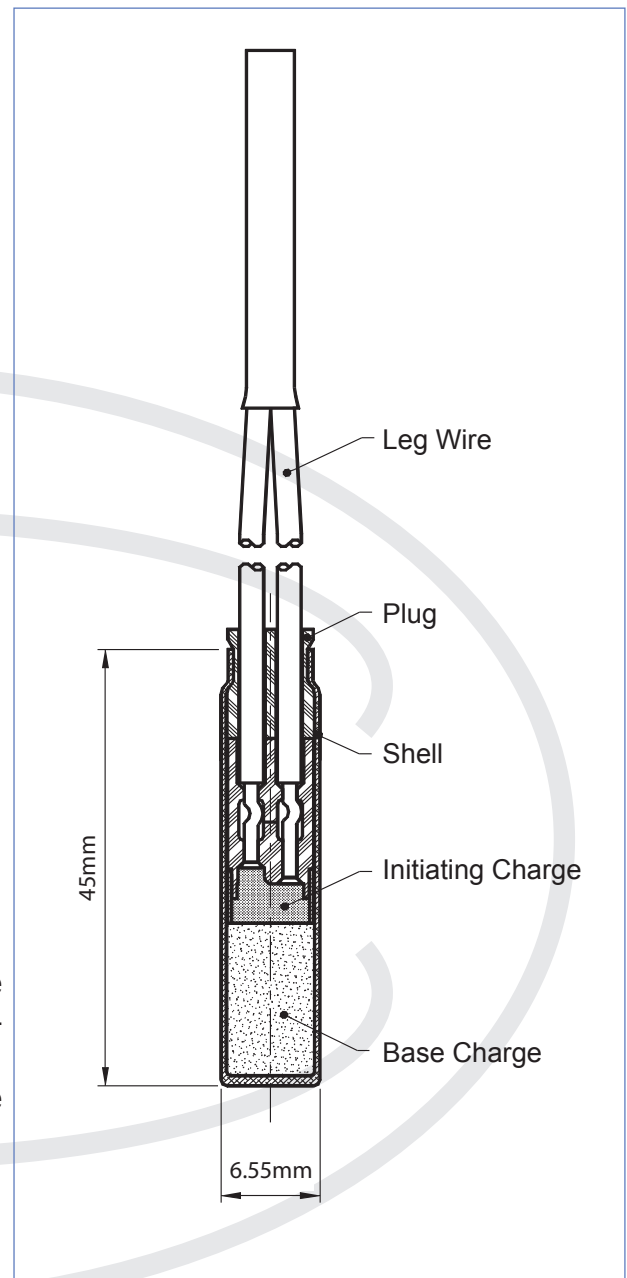

### Petro-Explo, Inc.

7650 U.S. Hwy. 287, #100, Arlington, Texas 76001  
Phone: 817-478-8888 800-588-8282 Fax: 817-478-8891  
email: info@petroexplo.com