



Cobra/Primafuse Safety Fuse Assembly with Igniter cord connector



Petro-Explo, Inc.

PRODUCT : COBRA SAFETY FUSE ASSEMBLY

Manufacturer: Cia Mexicana de Mechas para Minas

SPECIFICATIONS:

Total detonator charge : 800 mg

Powder train weight: 4.7 g/m

Burn rate: 141 – 148 s/m

Tensile strength: 28 kg minimum

Water resistance: 1 ATM/ 1 hour

Jacket material: plastic

Color: Orange

Fuse lengths: 1m, 2m, 3 and 4 m

Igniter Cord Connector

Primary Charge: 6.1 grains Pyrotechnic Mixture (400 mg)

*Pyrotechnic Mixture contains: Carbon, sulfur, potassium nitrate, copper, zinc dust, calcium steavate & silicon

SHIPPING INFORMATION:

Packaging : 1 and 2 meters – 54 units per box

3 and 4 meters - 45 units per box

US DOT Classification: 1.4 B, EX-2005040494


Canada Approved Explosive : 1.4 B and 1.1B.

STORAGE: Store in a dry and well ventilated magazine and approved by local, state and federal regulations.

WARNING AND RECOMMENDATIONS:

This product is not authorized to be used in avalanche control applications, except by certified blasters or by qualified avalanche control blasters as defined by NSSA, that are state or federal state licensed, and /or that are required to follow the NSAA guidelines and procedures in the use of explosives in avalanche control. In applications other than avalanche control, it is required that the user must be a certified blaster.

When using safety fuse to initiate other detonators or explosive charges, it is recommended double priming. Also, in case of misfire it is recommended a waiting period of 60 minutes before the blaster or any other personnel returns to the blasting site.

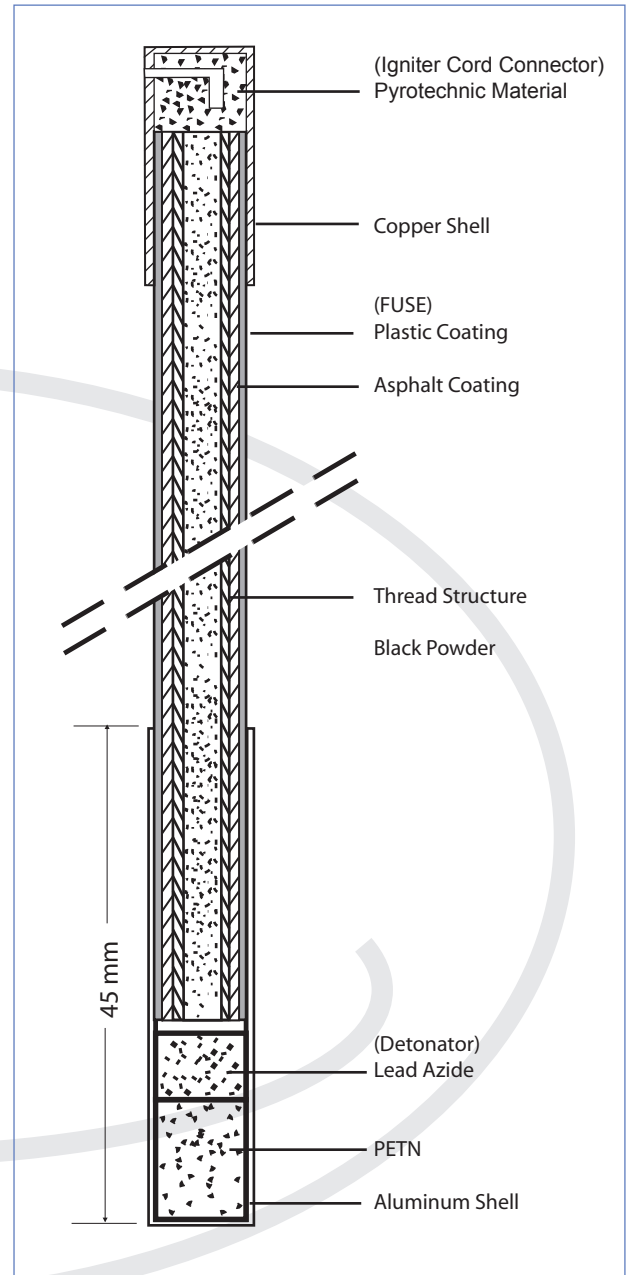

Petro-Explo, Inc.

7650 U.S. Hwy. 287, #100, Arlington, Texas 76001
Phone: 817-478-8888 800-588-8282 Fax: 817-478-8891
email: info@petroexplo.com